

NOTES:

1. BACKSET IS MEASURED FROM CENTERLINE OF BEVEL WHICH IS CENTERPOINT OF DOOR THICKNESS. REFER TO DEVICE TEMPLATE FOR BACKSET.
2. DIMENSIONS GIVEN IN INCHES AND (MM).
3. REFER TO CHART FOR SPECIAL HOLES REQUIRED BY TRIM FUNCTION.
4. CUTOUT DIMENSIONS MARKED (*) TO BE 1/2 (12.7) DEEP.

LHR SHOWN
RHR OPPOSITE


TEMPLATE CROSS REFERENCE

DESCRIPTION	TEMPLATE
ED6200A SERIES RIM DEVICE	T30508

REGULAR CYLINDER ONLY	
CC	ENLARGE TO 7/16 DIA. x 1" DEEP (11.1) (25.4)

TRIM	A	B	C	CC
T755 T855	●	●	●	●
T757 T857	●	●	●	●

REGULAR CYLINDER ONLY	
C	1/4 DIA. THRU (6.4)

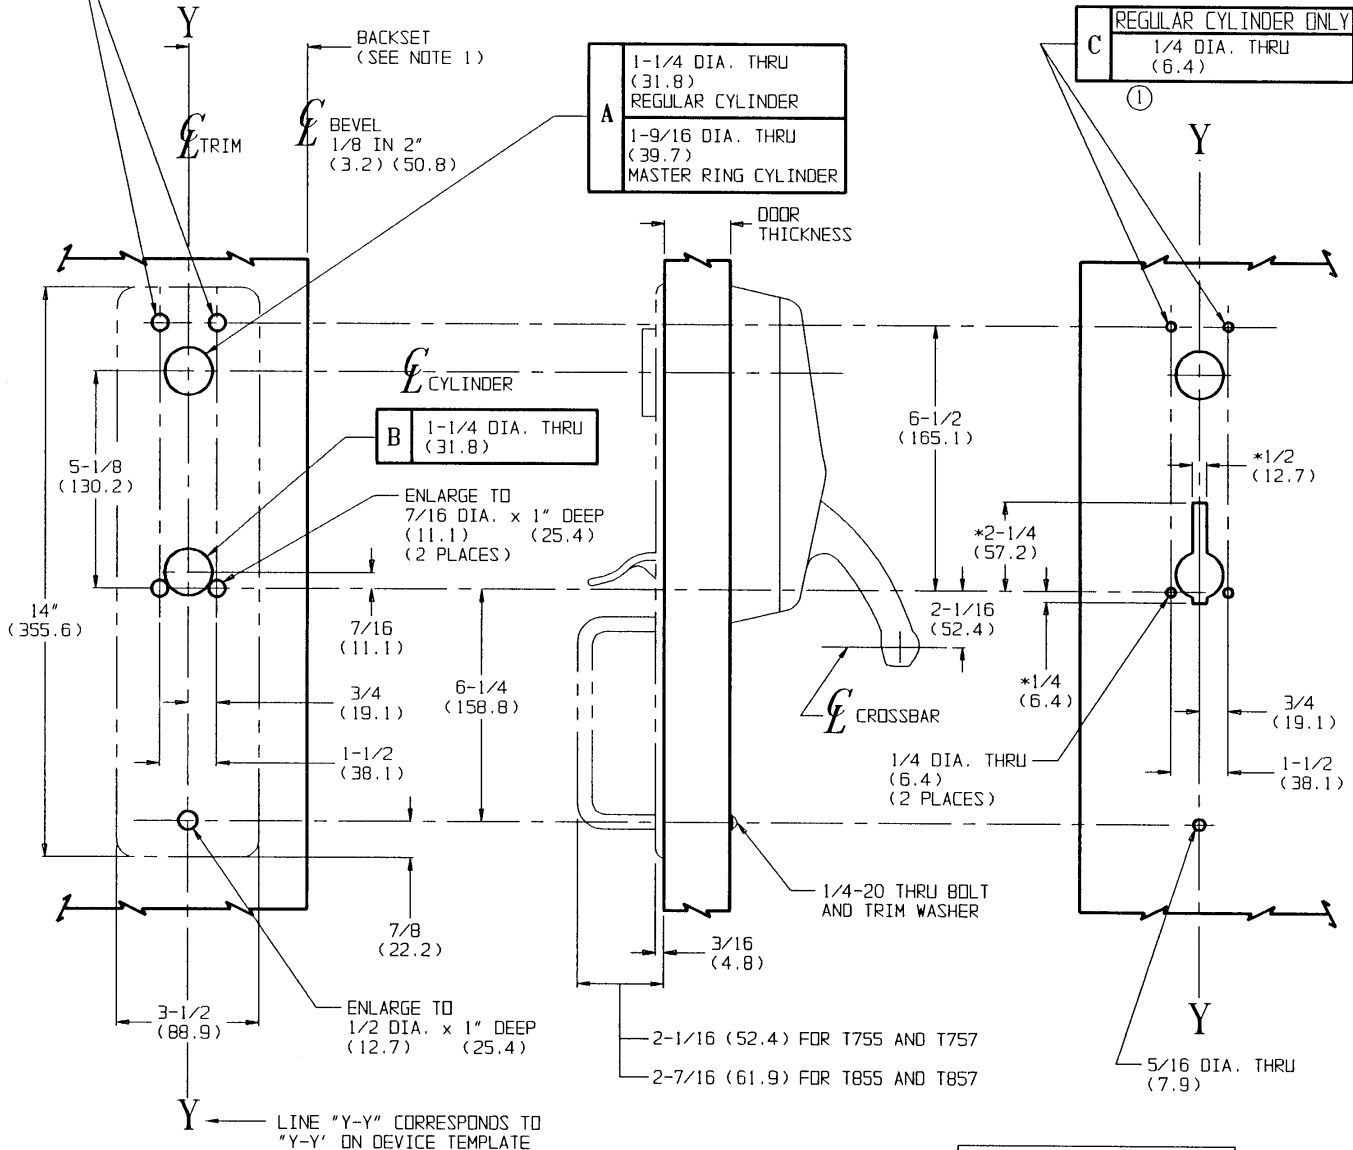

OUTSIDE FACE OF DOOR
(TRIM SIDE)

INSIDE FACE OF DOOR
(DEVICE SIDE)

RESPONSIBILITY

Door and Frame Manufacturers are responsible for providing adequate construction or reinforcements for proper installation of hardware shown. All architectural builders hardware must be installed on properly reinforced doors and frames, regardless of the type, material, or method of construction.

T755 T855
T757 T857

THUMBPIECE PULL ESCUTCHEON TRIM
FIRE RATED RIM DEVICE

Corbin Russwin
www.corbinrusswin.com

DO NOT SCALE DRAWING

SUPERSEDES	T30510	DR.	DLO	APR
DATE	1/28/94	TEMPLATE NUMBER	T30510-1	