


NOTES:

1. BACKSET IS MEASURED FROM CENTERLINE OF BEVEL WHICH IS CENTERPOINT OF DOOR THICKNESS.
2. DOOR PREP WITH 2-3/4" BACKSET MEETS ANSI STANDARDS A115.2 FOR STEEL DOORS AND A115.W2 FOR WOOD DOORS PLUS THROUGH BOLT HOLES SHOWN.
3. DIMENSIONS GIVEN IN INCHES AND (MM).
4. 1-1/4" STRIKE LIP SUITS FRAME FOR 1-3/4" THICK DOOR. LIP WILL VARY FOR OTHER DOOR THICKNESSES.

TEMPLATE CROSS REFERENCE


DESCRIPTION	TEMPLATE
CL3600 SERIES ALL OTHER FUNCTIONS	T30468

FRONT WIDTH B	
1-1/8 (28.6)	REGULAR
1" (25.4)	OPTIONAL

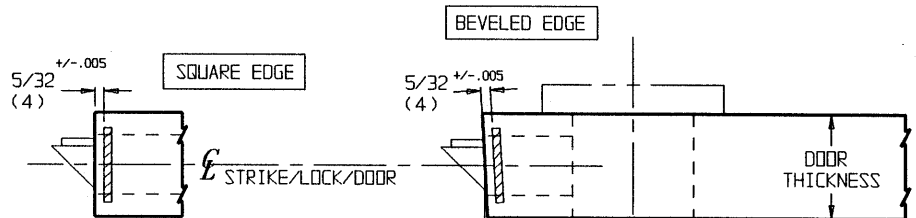


CAUTION: DOOR AND FRAME MANUFACTURERS

WHEN DOOR GASKETING OR SILENCERS ARE USED, PROPER ALLOWANCES MUST BE MADE FOR STRIKE LOCATION TO MAINTAIN A COMMON CENTERLINE WITH LOCK AND DOOR AS SHOWN SO THAT BOLT WILL FREELY ENTER STRIKE.

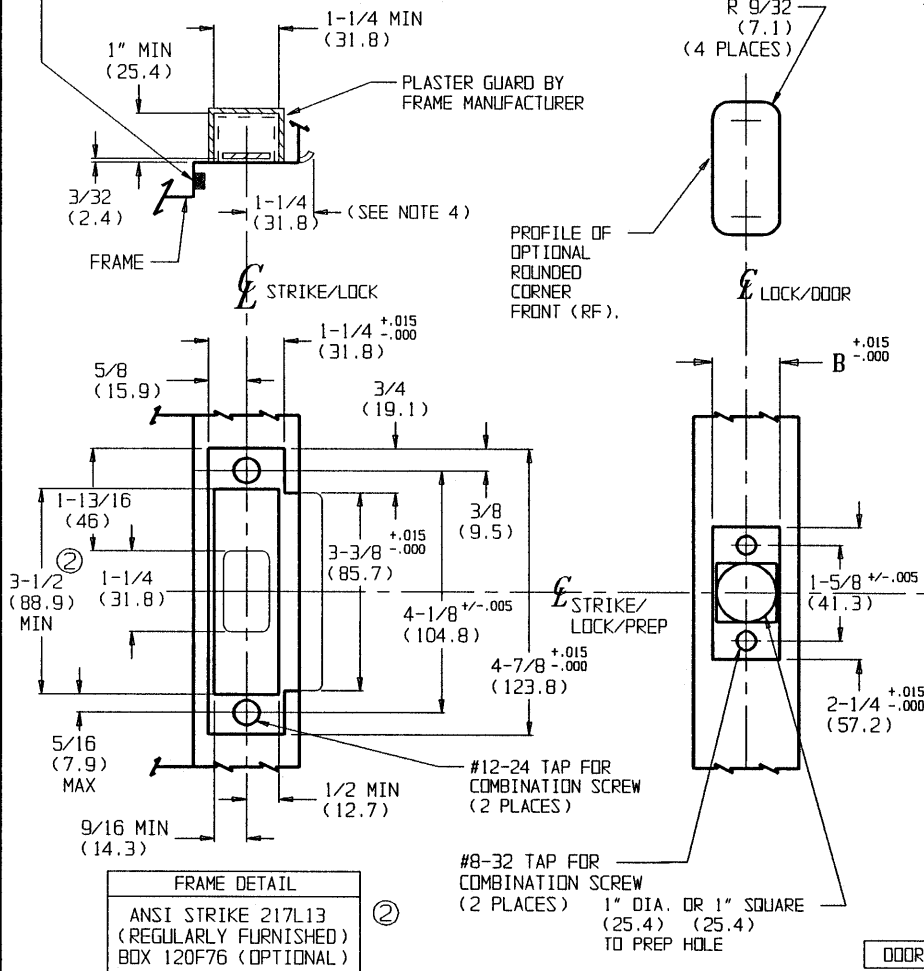

BACKSET A	
2-3/4 (69.9)	REGULAR
2-3/8 (60.3)	OPTIONAL
3-3/4 (95.3)	
5" (127)	

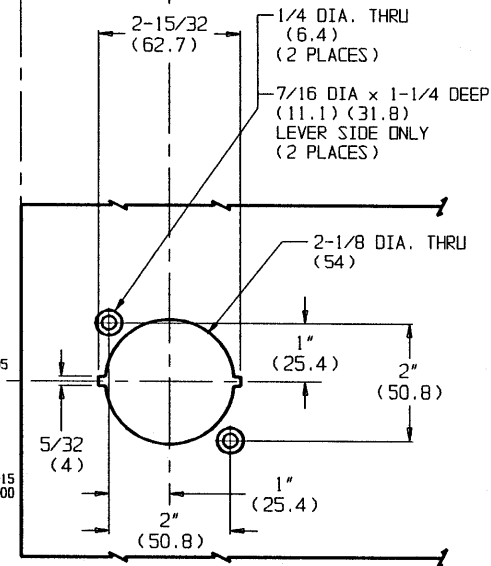

TOLERANCES	
INCHES	(MM)
.005	(.127)
.015	(.381)

RESPONSIBILITY

Door and Frame Manufacturers are responsible for providing adequate construction or reinforcements for proper installation of hardware shown. All architectural builders hardware must be installed on properly reinforced doors and frames, regardless of the type, material, or method of construction.

CL3690
CL3691

CYLINDRICAL LEVER LOCKSET
THUMBTURN FUNCTIONS

**Corbin
Russwin**
www.corbinrusswin.com

DO NOT SCALE DRAWING
SUPERSEDES T30567-1 OR OLD APP. *[Signature]*
DATE 1-98 TEMPLATE NUMBER T30567-2