





Specifications

KEY AND PIN SPECIFICATIONS (.019") FOR BUMP RESISTANT CYLINDERS

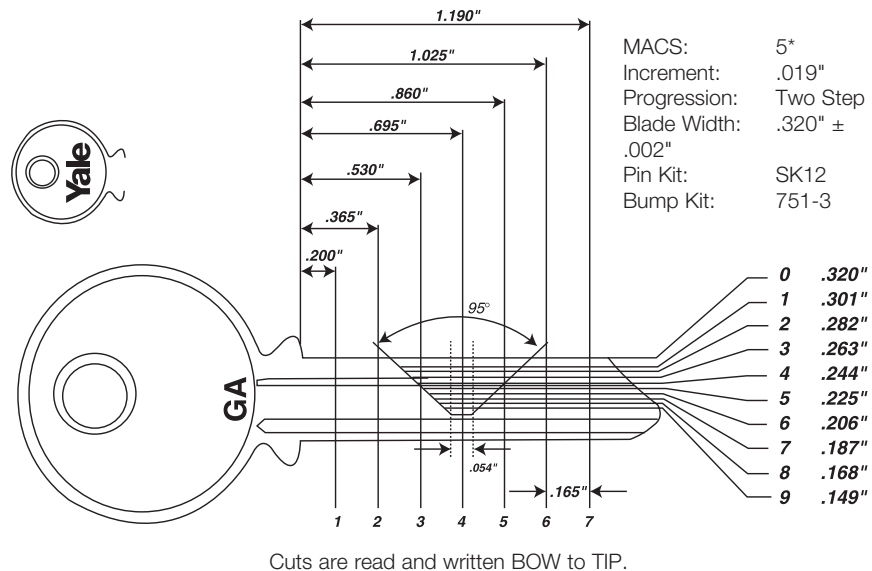

Cuts are read and written BOW to TIP.

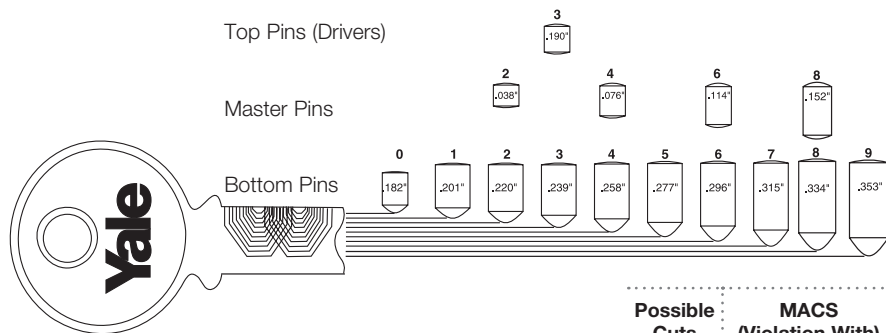

***MACS (Maximum Adjacent Cut Specification):** the maximum allowable difference between cut depths.


Note: Bump resistance is only achieved when all chambers include a bump resistant pin. Illustrations are not drawn to actual size or configuration.

Possible Cuts	MACS (Violation With)
0	6, 7, 8, 9
1	7, 8, 9
2	8, 9
3	9
4	None
5	None
6	0
7	0, 1
8	0, 1, 2
9	0, 1, 2, 3



Specifications

PINNING FORMULA

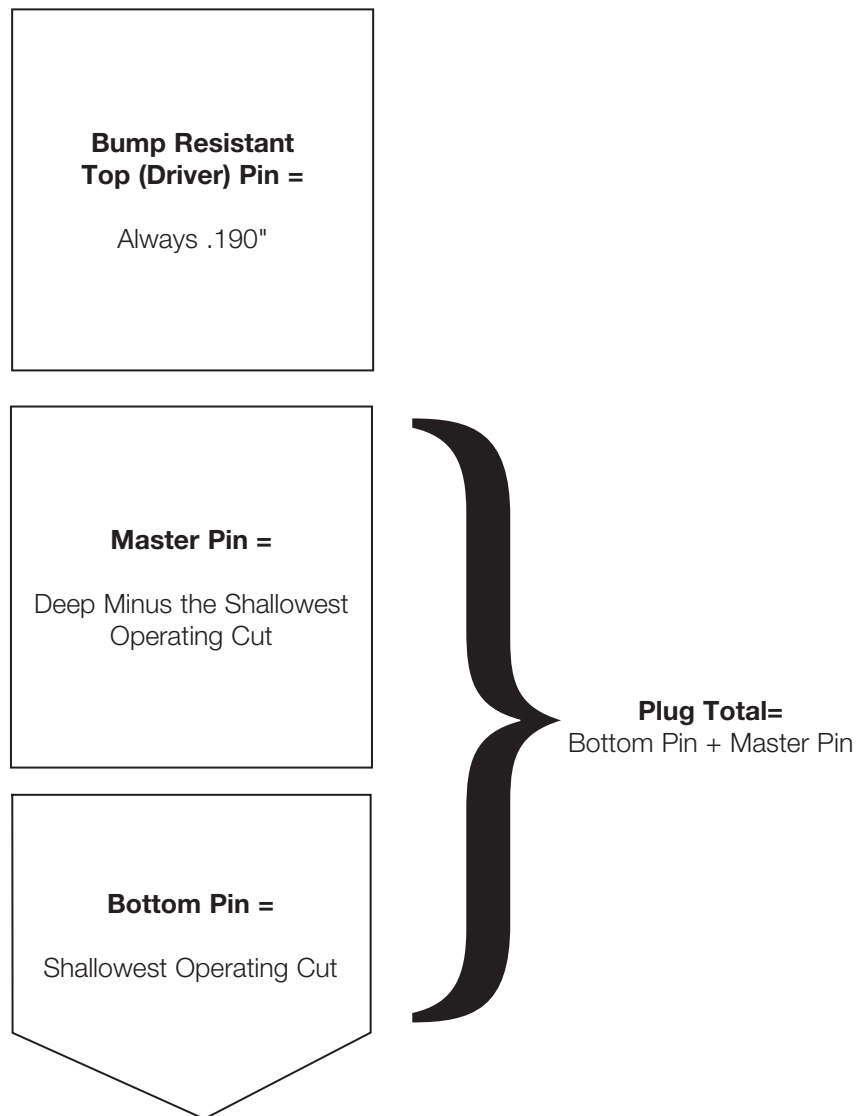

Yale Locks & Hardware
Address: 225 Episcopal Road
Berlin, CT 06037-4004
Tel: 1-800-438-1951
Fax: 1-800-338-0965
yalelocks.com

Yale Locks & Hardware is a division of Yale Security, Inc., an ASSA ABLOY Group Company. Yale® is a registered trademark of Yale Security, Inc., an ASSA ABLOY Group Company. Other products' brand names may be trademarks or registered trademarks of their respective owners and are mentioned for reference purposes only. These materials are protected under U.S. copyright laws. All contents current at the time of publication. Yale Security, Inc. reserves the right to change availability of an item in this catalog, its design, construction, and/or its materials. Copyright © 2007-2016, Yale Security, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of the Yale Security, Inc., an ASSA ABLOY Group company is prohibited.

YALE, with its unique global reach and range of products, is the world's favorite lock.
ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience.

42590 - 3/16R