


NOTES:

- BACKSET IS MEASURED FROM CENTERLINE OF BEVEL WHICH IS CENTERPOINT OF DOOR THICKNESS.
- DOOR PREP WITH 2-3/4" BACKSET MEETS ANSI STANDARDS A115.2 FOR STEEL STEEL DOORS AND A115.W2 FOR WOOD DOORS PLUS THROUGH BOLT HOLES SHOWN.
- DIMENSIONS GIVEN IN INCHES AND (MM).
- 1-1/4" STRIKE LIP SUITS FRAME FOR 1-3/4" THICK DOOR. LIP WILL VARY FOR OTHER DOOR THICKNESSES.
- DOOR PREP WILL VARY FOR 3/4" LATCH ASSEMBLY. REFER TO TEMPLATE T30528 FOR DETAILS.




TEMPLATE CROSS REFERENCE

DESCRIPTION	TEMPLATE
CL3450 & CL3470 DUMMY TRIM	T30460
CL3490 & CL3491 THUMBTURN FUNCTION	T30475
586L19 OPTIONAL STRIKE	T30476
M16 3/4" LATCH	T30528
601F28 RABBETED FRONT & STRIKE	T30640

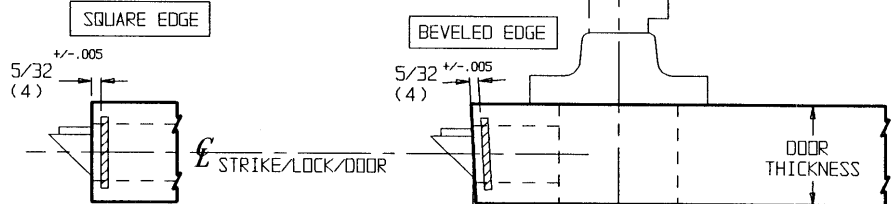

CAUTION: DOOR AND FRAME MANUFACTURERS

WHEN DOOR GASKETING OR SILENCERS ARE USED, PROPER ALLOWANCES MUST BE MADE FOR STRIKE LOCATION TO MAINTAIN A COMMON CENTERLINE WITH LOCK AND DOOR AS SHOWN SO THAT BOLT WILL FREELY ENTER STRIKE.

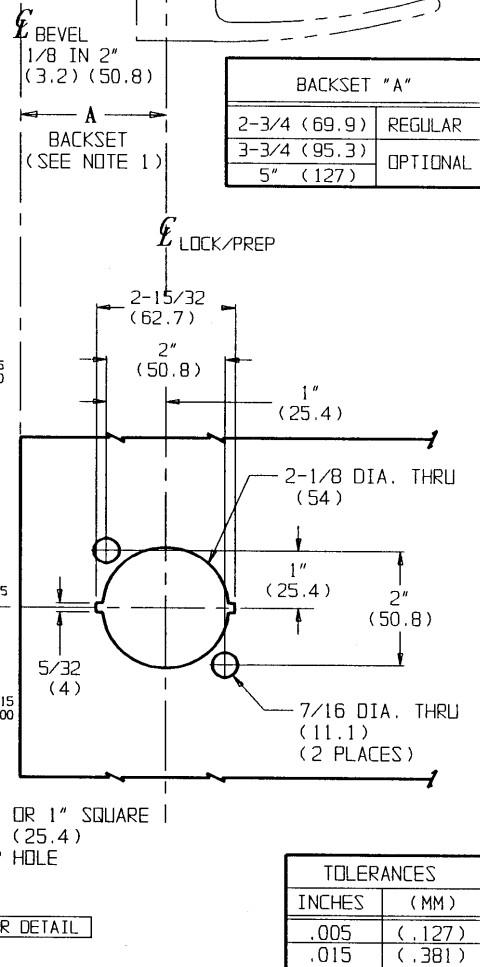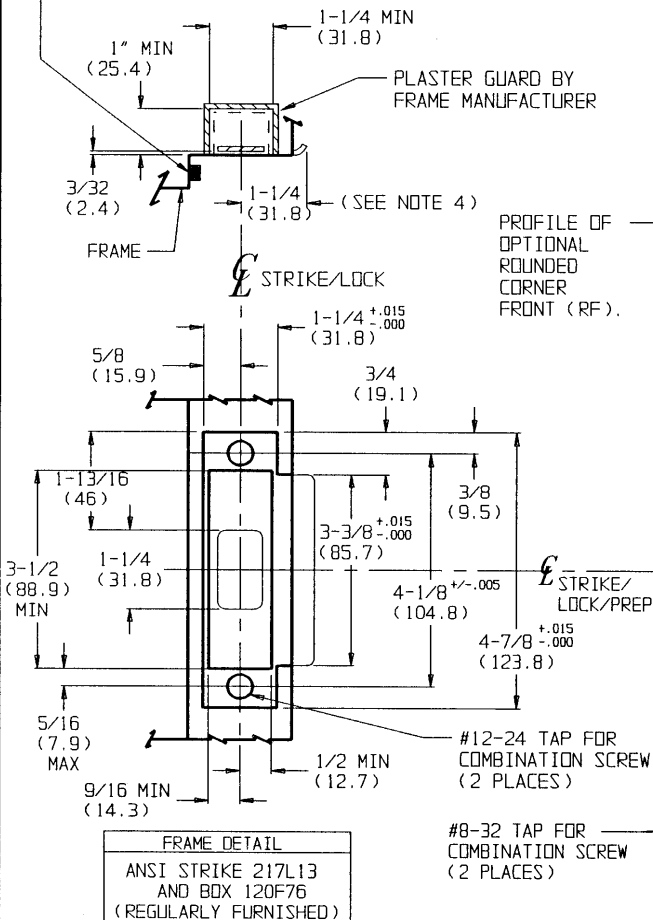

RESPONSIBILITY

Door and Frame Manufacturers are responsible for providing adequate construction or reinforcements for proper installation of hardware shown. All architectural builders hardware must be installed on properly reinforced doors and frames, regardless of the type, material, or method of construction.

CL3400 Series
CYLINDRICAL LEVER LOCKSET

ALL FUNCTIONS AND TRIMS
EXCEPT THUMBTURN, DUMMY TRIM,
AND M16 LATCH (3/4")

**Corbin
Russwin**
www.corbinrusswin.com

DO NOT SCALE DRAWING			
SUPERSEDES	T30458-1	DR.	OLD
DATE	1/28/94	TEMPLATE NUMBER	T30458-2