



NOTES:

1. BACKSET IS MEASURED FROM CENTERLINE OF BEVEL WHICH IS CENTERPOINT OF DOOR THICKNESS.
2. DOOR PREP WITH 2-3/4" (69.9) BACKSET MEETS ANSI STANDARDS A115.2 FOR STEEL DOORS AND A115.W2 FOR WOOD DOORS PLUS THROUGH BOLT HOLES SHOWN.
3. DIMENSIONS GIVEN IN INCHES AND (MM).
4. 1-1/4" STRIKE LIP SUITS FRAME FOR 1-3/4" THICK DOOR. LIP WILL VARY FOR OTHER DOOR THICKNESSES.

TEMPLATE CROSS REFERENCE



DESCRIPTION	TEMPLATE
CL3650 & CL3670 DUMMY TRIM	T30473
CL3690 & CL3691 THUMBTURN	T30567
586L19 OPTIONAL STRIKE	T30476
601F28 RABBETED FRONT & STRIKE	T30640

FRONT WIDTH B	
1-1/8 (28.6)	REGULAR
1" (25.4)	OPTIONAL

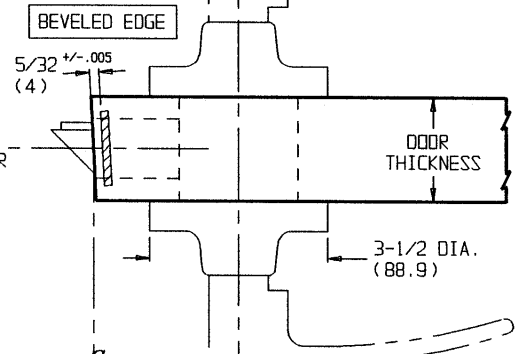


CAUTION: DOOR AND FRAME MANUFACTURERS




WHEN DOOR GASKETING OR SILENCERS ARE USED, PROPER ALLOWANCES MUST BE MADE FOR STRIKE LOCATION TO MAINTAIN A COMMON CENTERLINE WITH LOCK AND DOOR AS SHOWN SO THAT BOLT WILL FREELY ENTER STRIKE.

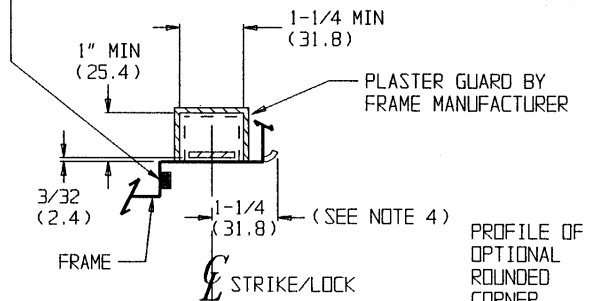

PROFILE OF OPTIONAL ROUNDED CORNER FRONT (RF).



BACKSET A	
2-3/4 (69.9)	REGULAR
2-3/8 (60.3)	OPTIONAL
3-3/4 (95.3)	
5" (127)	

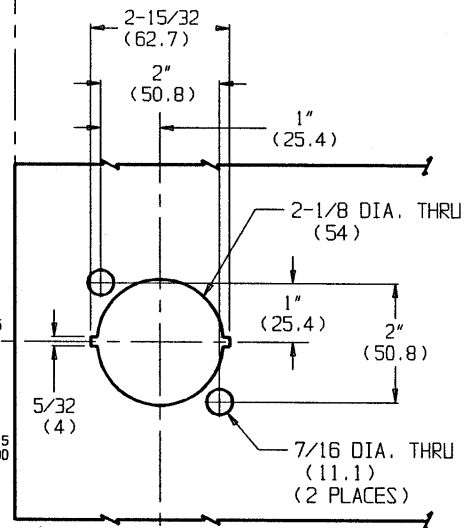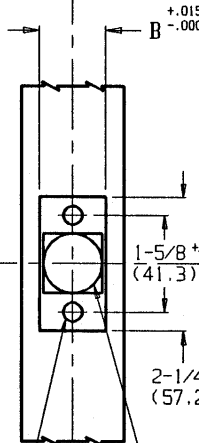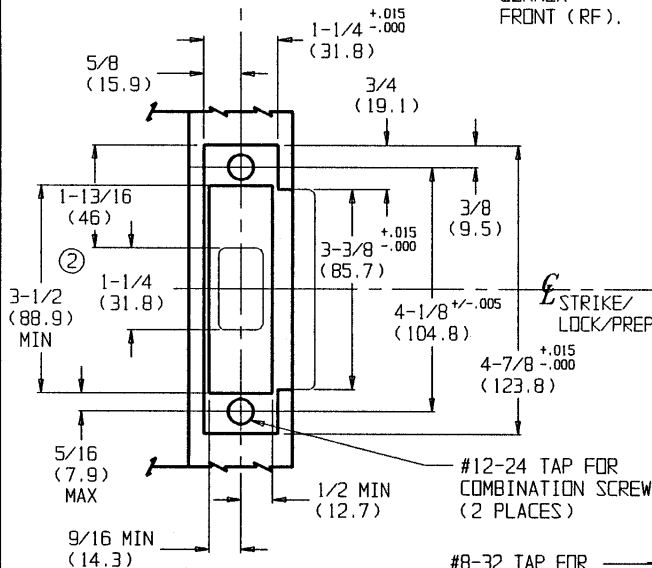

FRAME DETAIL

ANSI STRIKE 217L13
(REGULARLY FURNISHED)
BOX 120F76 (OPTIONAL)

#12-24 TAP FOR COMBINATION SCREW (2 PLACES)
#8-32 TAP FOR COMBINATION SCREW (2 PLACES)

1" DIA. OR 1" SQUARE (25.4) (25.4)
TO PREP HOLE

DOOR DETAIL

TOLERANCES

INCHES	(MM)
.005	(.127)
.015	(.381)

RESPONSIBILITY

Door and Frame Manufacturers are responsible for providing adequate construction or reinforcements for proper installation of hardware shown. All architectural builders hardware must be installed on properly reinforced doors and frames, regardless of the type, material, or method of construction.

CL3600 Series CYLINDRICAL LEVER LOCKSET

ALL FUNCTIONS AND TRIMS EXCEPT THUMBTURN AND DUMMY TRIM

Corbin Russwin
www.corbinrusswin.com

DO NOT SCALE DRAWING

SUPERSEDES T30468-1 DR. OLD
DATE 1-98 TEMPLATE NUMBER T30468-2