

NOTES:

1. BACKSET IS MEASURED FROM CENTERLINE OF BEVEL WHICH IS CENTERPOINT OF DOOR THICKNESS. REFER TO DEVICE TEMPLATE FOR BACKSET.
2. DIMENSIONS GIVEN IN INCHES AND (MM).
3. REFER TO CHART FOR SPECIAL HOLES REQUIRED BY TRIM FUNCTION.

LHR SHOWN
RHR OPPOSITE


TEMPLATE CROSS REFERENCE

DESCRIPTION	TEMPLATE
ED6200 SERIES RIM DEVICE	T30566
ED6200 SERIES x SD4	T30589

TRIM	A	B	C	CC
T355 T455	●	●	●	●
T357 T457	●		●	●

REGULAR CYLINDER ONLY
CC ENLARGE TO
7/16 DIA. x 1" DEEP
(11.1) (25.4)

REGULAR CYLINDER ONLY
C 1/4 DIA. THRU
(6.4)

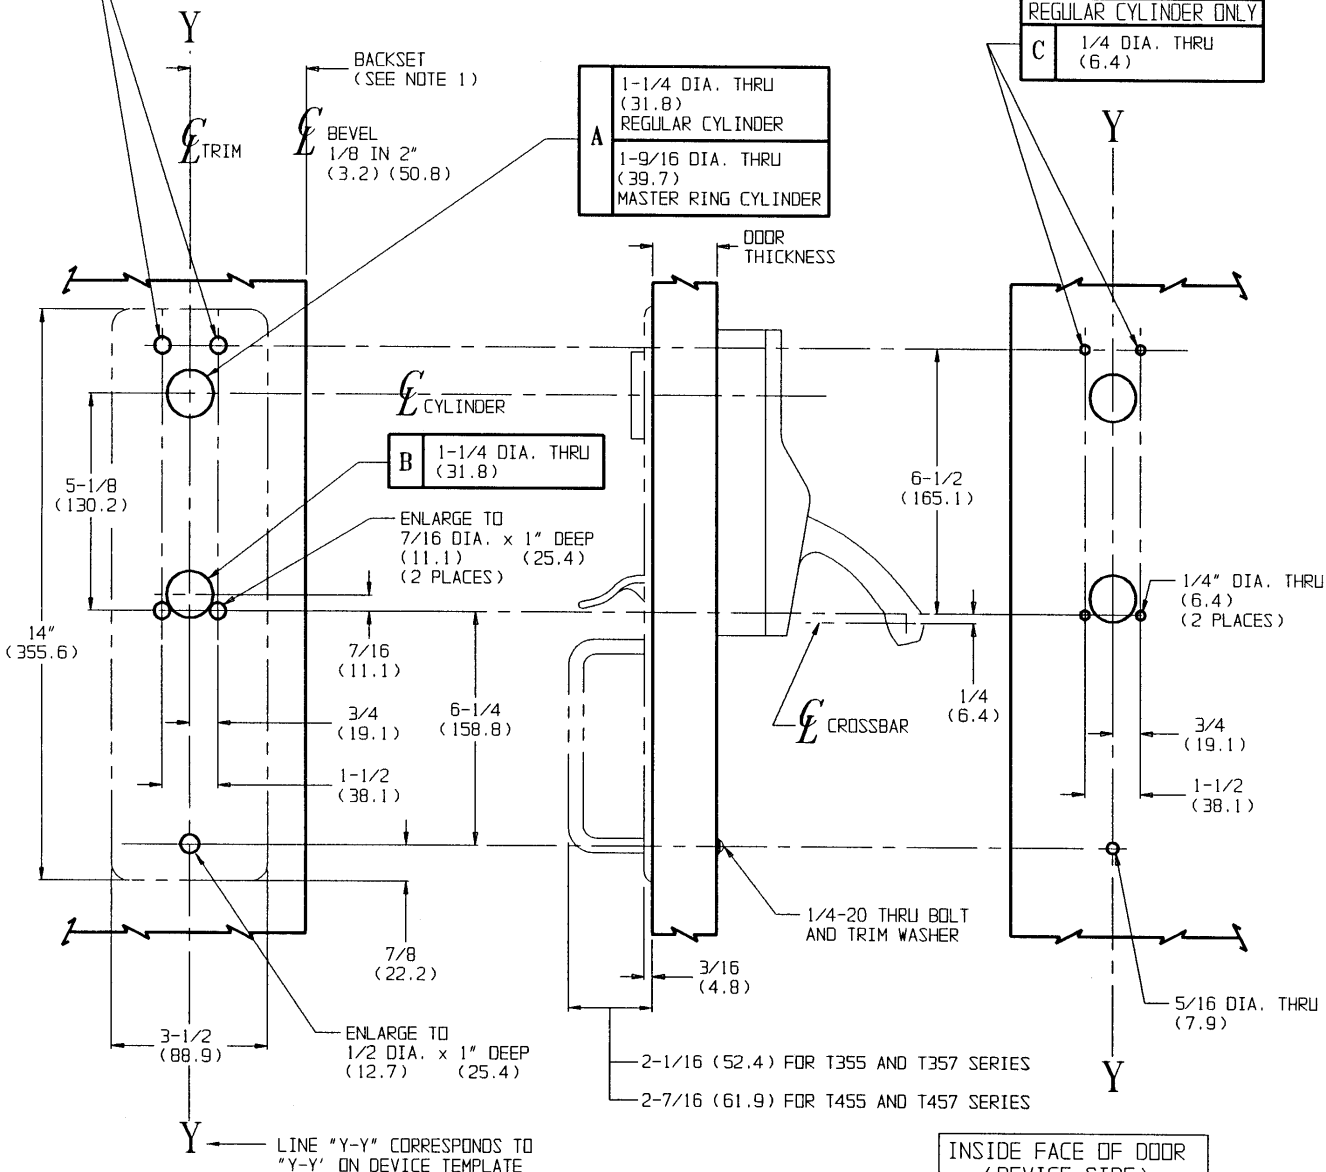

OUTSIDE FACE OF DOOR
(TRIM SIDE)

INSIDE FACE OF DOOR
(DEVICE SIDE)

RESPONSIBILITY

Door and Frame Manufacturers are responsible for providing adequate construction or reinforcements for proper installation of hardware shown. All architectural builders hardware must be installed on properly reinforced doors and frames, regardless of the type, material, or method of construction.

T355 T455
T357 T457

THUMBPIECE PULL ESCUTCHEON TRIM
CROSSBAR RIM DEVICE

**Corbin
Russwin**
www.corbinrusswin.com

DO NOT SCALE DRAWING
SUPERSEDES T30598 DR. DLO
DATE 1/28/94 TEMPLATE NUMBER T30598-1