

NOTES:


1. BACKSET IS MEASURED FROM CENTERLINE OF BEVEL WHICH IS CENTERPOINT OF DOOR THICKNESS.
2. 1-1/8" (28.6) STRIKE LIP SUITS FRAME FOR 1-3/4" (44.5) THICK DOOR. LIP VARIES FOR OTHER DOOR THICKNESSES.
3. DIMENSIONS GIVEN IN INCHES AND (MM).
4. FOR PREPARATION OF TRIM, REFER TO SEPARATE TEMPLATE.

TEMPLATE CROSS REFERENCE

DESCRIPTION	TEMPLATE
ED66900 ECE SERIES MORTISE DEVICE	T30588
OPEN BACK STRIKE	T30606

CAUTION: DOOR AND FRAME MANUFACTURERS

WHEN DOOR GASKETING OR SILENCERS ARE USED, PROPER ALLOWANCES MUST BE MADE FOR STRIKE LOCATION TO MAINTAIN A COMMON CENTERLINE WITH LOCK AND DOOR AS SHOWN SO THAT BOLT WILL FREELY ENTER STRIKE.

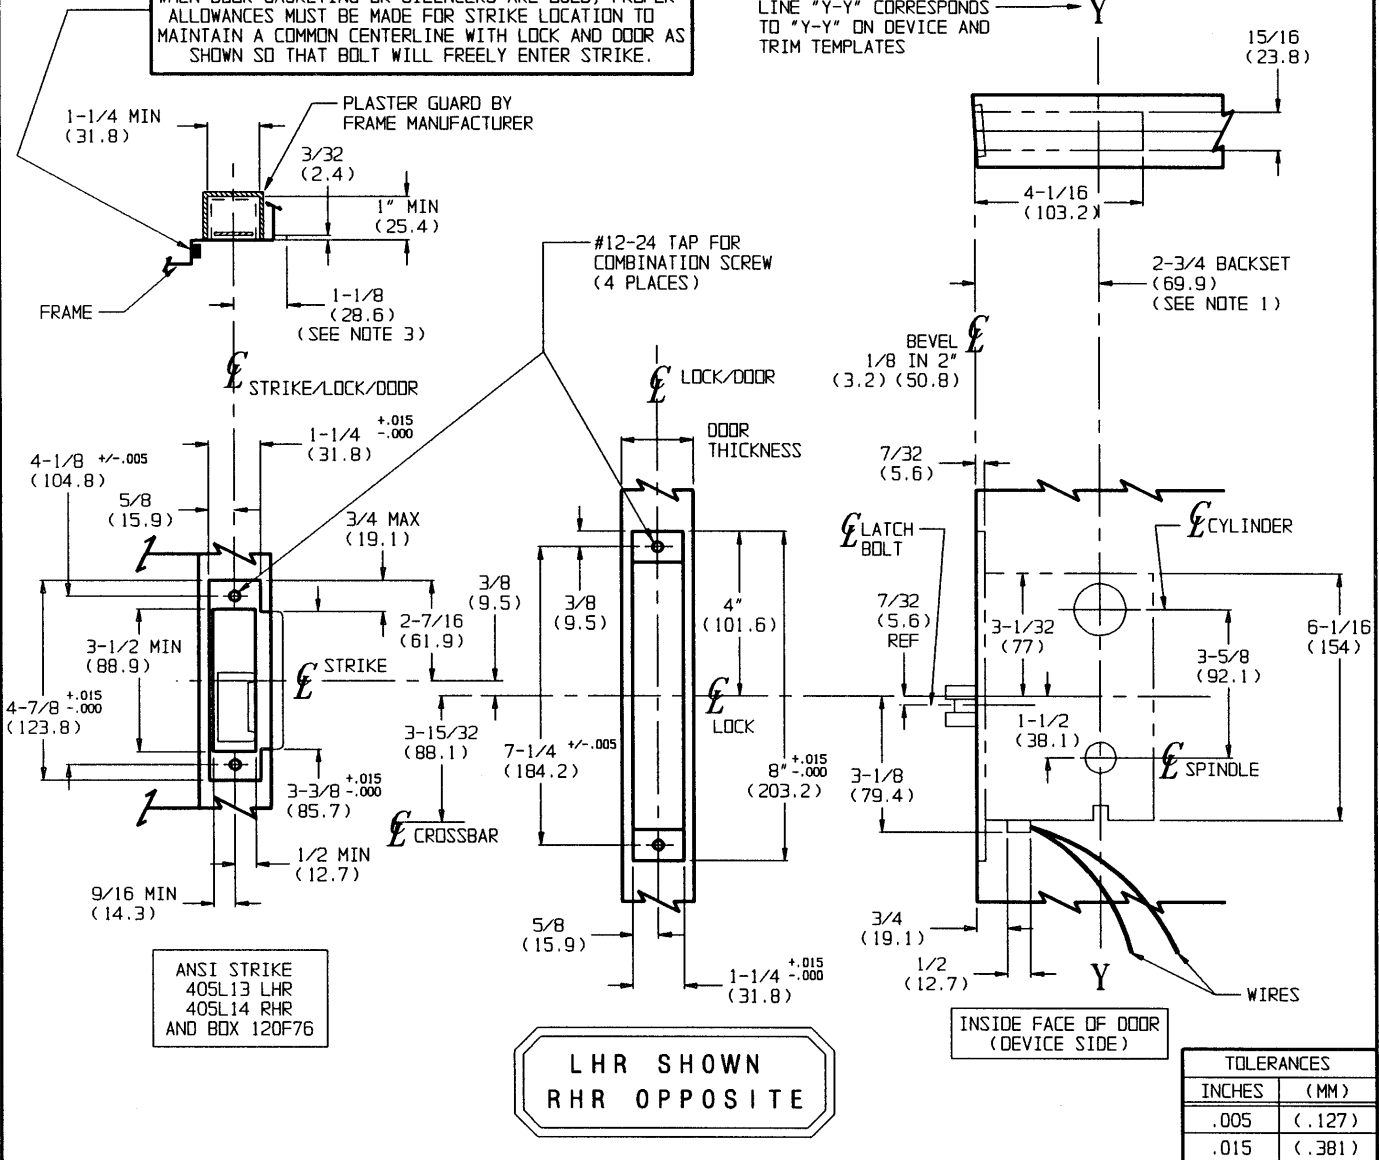

RESPONSIBILITY

Door and Frame Manufacturers are responsible for providing adequate construction or reinforcements for proper installation of hardware shown. All architectural builders hardware must be installed on properly reinforced doors and frames, regardless of the type, material, or method of construction.

MLE10 SERIES
MLE11 SERIES

SOLENOID OPERATED
ECE MORTISE EXIT LOCK

**Corbin
Russwin**
www.corbinrusswin.com

DO NOT SCALE DRAWING

SUPERSEDES VT30320 DR. KJ APP.

DATE 5/28/93 TEMPLATE NUMBER T30635